



### Company Background and Philosophy

Pazzaglia- A premier manufacturer of specialized nursery equipment worldwide.


Founded in 1983, Pazzaglia S.p.A. has grown from a small machine shop into a modern factory of heart production facilities. Over the years their industry leading engineers and highly trained staff have designed and assembled thousands of machines for a worldwide nursery market. The factory is located in the perfect proving ground for their equipment, the renowned Pistoia growing region of Italy. Pistoia is home to over 1500 nurseries and considered the nursery capital of Europe.

Pazzaglia's goal is to provide superbly engineered, highly efficient and cost effective machinery for the daily tasks of the nurseryman. Focus is on conserving land, labor and energy. These issues have been primary for the European grower for many decades. In today's environment of costlier resources, they are now also a primary focus of most American growers as well.

Pazzaglia machinery has the distinct advantage of being a long proven solution to these challenges for nurseries throughout Europe, North America and other countries worldwide. Our complete commitment to engineering quality, performance and reliability is coupled with our philosophy: design and build and money saving machinery that simultaneously improves plant quality and consistency.

If the challenge of labor costs and efficient land use are of concern to you....do as the Romans did and drive a Pazzaglia machine on your nursery today and see what you'll be saving!

Rotating Digging Head

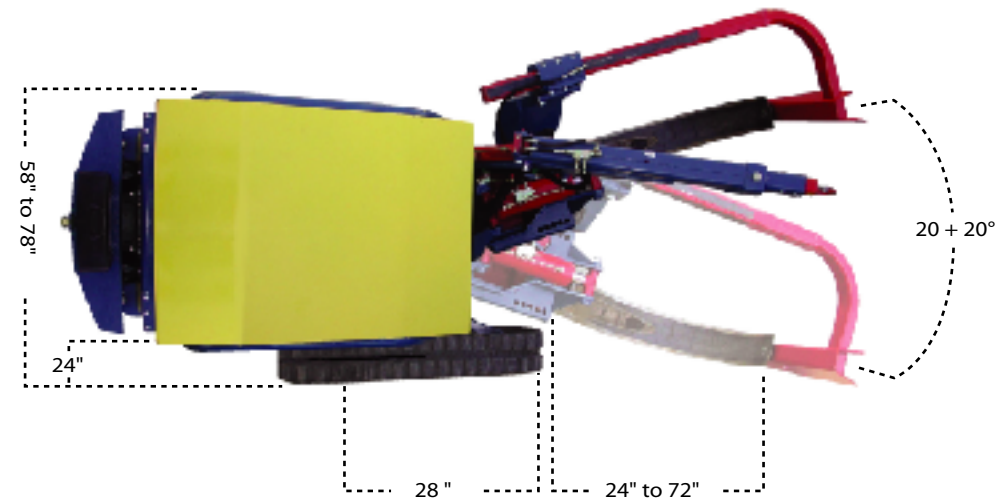

Weight Transfer System



FZ 180

### ROOT-BALLING EQUIPMENT

High strength steel blades

Applicable blades in inches: ø:24, 28, 30, 32, 36, 40, 44, 48, 52, 56, 60, 64, 68, 72

Vibrator: hydraulic with controlled pulsation

Lateral rotation of root-balling device: 20° right- and leftwards to facilitate work in narrow row spacing - hydraulic blade arm

Controls: electro-hydraulic controls with Joystick

### SPECIFICATIONS

Engine: KUBOT A 3.300  
Max. power: 74 HP at 3.000 rpm  
Displacement: 3.300 cm<sup>3</sup>

Track system: track tensioning system with grease cylinder  
rubber tracks, width 14"  
8 large pulleys

Chassis with: floating frame system  
cabin with integrated roll cage  
center of gravity slide of 28"  
weight transfer system, displacement 24"

Forward / backward speed: 0 to 5mph

Operator seat: super comfort extra

Options: Available with quick-release system upon request