



Company Background and Philosophy

Pazzaglia - A premier manufacturer of specialized nursery equipment worldwide.


Founded in 1983, Pazzaglia S.p.A. has grown from a small machine shop into a modern factory with state-of-the-art production facilities. Over the years their industry leading engineers and highly trained workforce have designed and assembled thousands of machines for a worldwide nursery market. The factory itself is located in the perfect proving ground for their equipment - the renowned Pistoia growing region of Italy. Pistoia is home to over 1500 nurseries and considered the nursery capital of Europe.

Pazzaglia's goal is to provide superbly engineered, highly efficient and cost effective mechanization of the daily tasks of the nurseryman. Focus is on conserving land, labor and energy. These issues have been primary for the European grower for many decades. In today's environment of costlier resources, they are now also a primary focus of most American growers as well.


Pazzaglia machinery has the distinct advantage of being a long proven solution to these challenges in nurseries throughout Europe, North America and other countries worldwide. A complete commitment to engineering quality, performance and reliability is coupled with a simple philosophy: design and build time and money saving machinery that simultaneously improves plant quality and consistency.

If the challenge of labor costs and efficient land use are of concern to you...do as the Romans do....test drive a Pazzaglia machine on your nursery today and see what you'll be saving!

Rotating digging head

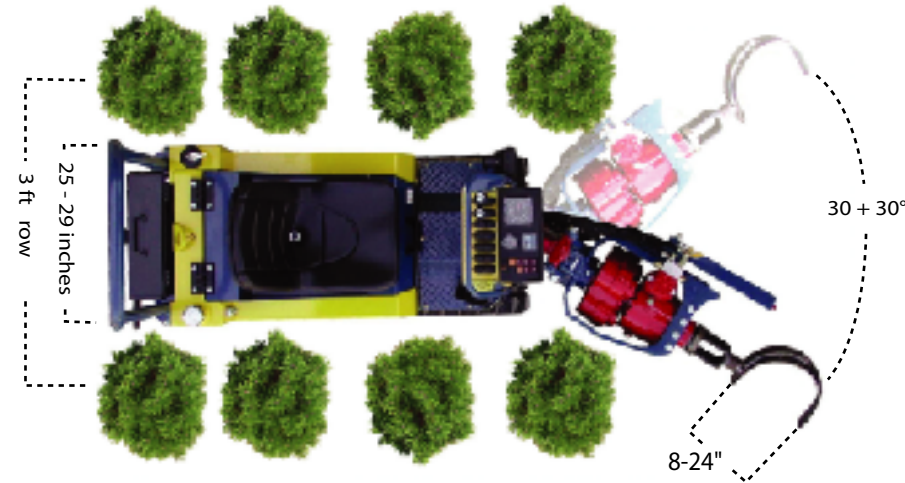

Adjustable Track Width

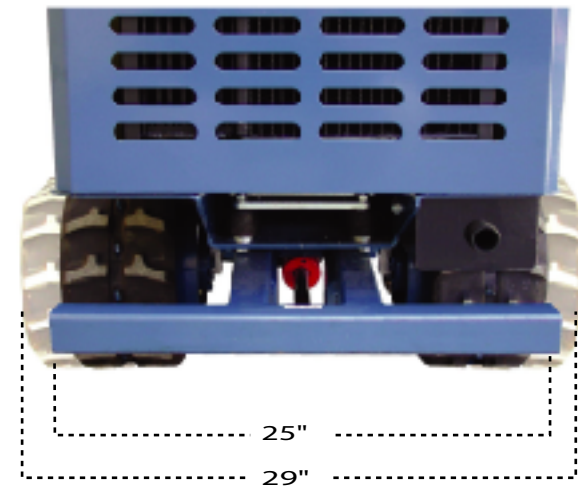

FZ 50

ROOT-BALLING EQUIPMENT

High strength steel blades
 Applicable blades in inches: ø 8", 10", 12", 14", 16", 18", 20", 22", 24"

Vibrator: hydraulic with controlled pulsation

Lateral rotation of root-balling device: 30° right- and leftwards to facilitate work in narrow row spacing

controls: hydraulic controls

SPECIFICATIONS:

Engine: LOMBARDINI LDW 903
 Max. power: 23 HP at 3.000 rpm
 Displacement: 916 cc

Track system: continuous rubber tracks
 with 4 pulleys
 hydraulically adjustable track width

Chassis with: rear stabilization foot

Forward / backward speed: 0-2 mph

Operator seat: comfort

Options: blades, blade arm, tree binder LP 250 ...